


CAUTION - THIS PROJECT REQUIRES CONSTRUCTION WORK IN, AROUND, AND OVER HAZARDOUS AND UNPROTECTED MINE SHAFTS, STOPES, ADITS, AND OTHER OPENINGS WHICH MAY BE OPEN TO THE SURFACE OR HIDDEN FROM VIEW BY TRASH, DEBRIS, OR THIN AND UNSTABLE LAYERS OF SURFACE MATERIALS OR ROCK. THE CONSTRUCTOR SHALL BE RESPONSIBLE FOR THOROUGHLY INVESTIGATING THE SITE CONDITIONS AND SCHEDULING HIS EQUIPMENT, EQUIPMENT OPERATIONS, PERSONNEL, AND SAFETY PROCEDURES TO PREVENT ACCIDENTS AND INJURIES.

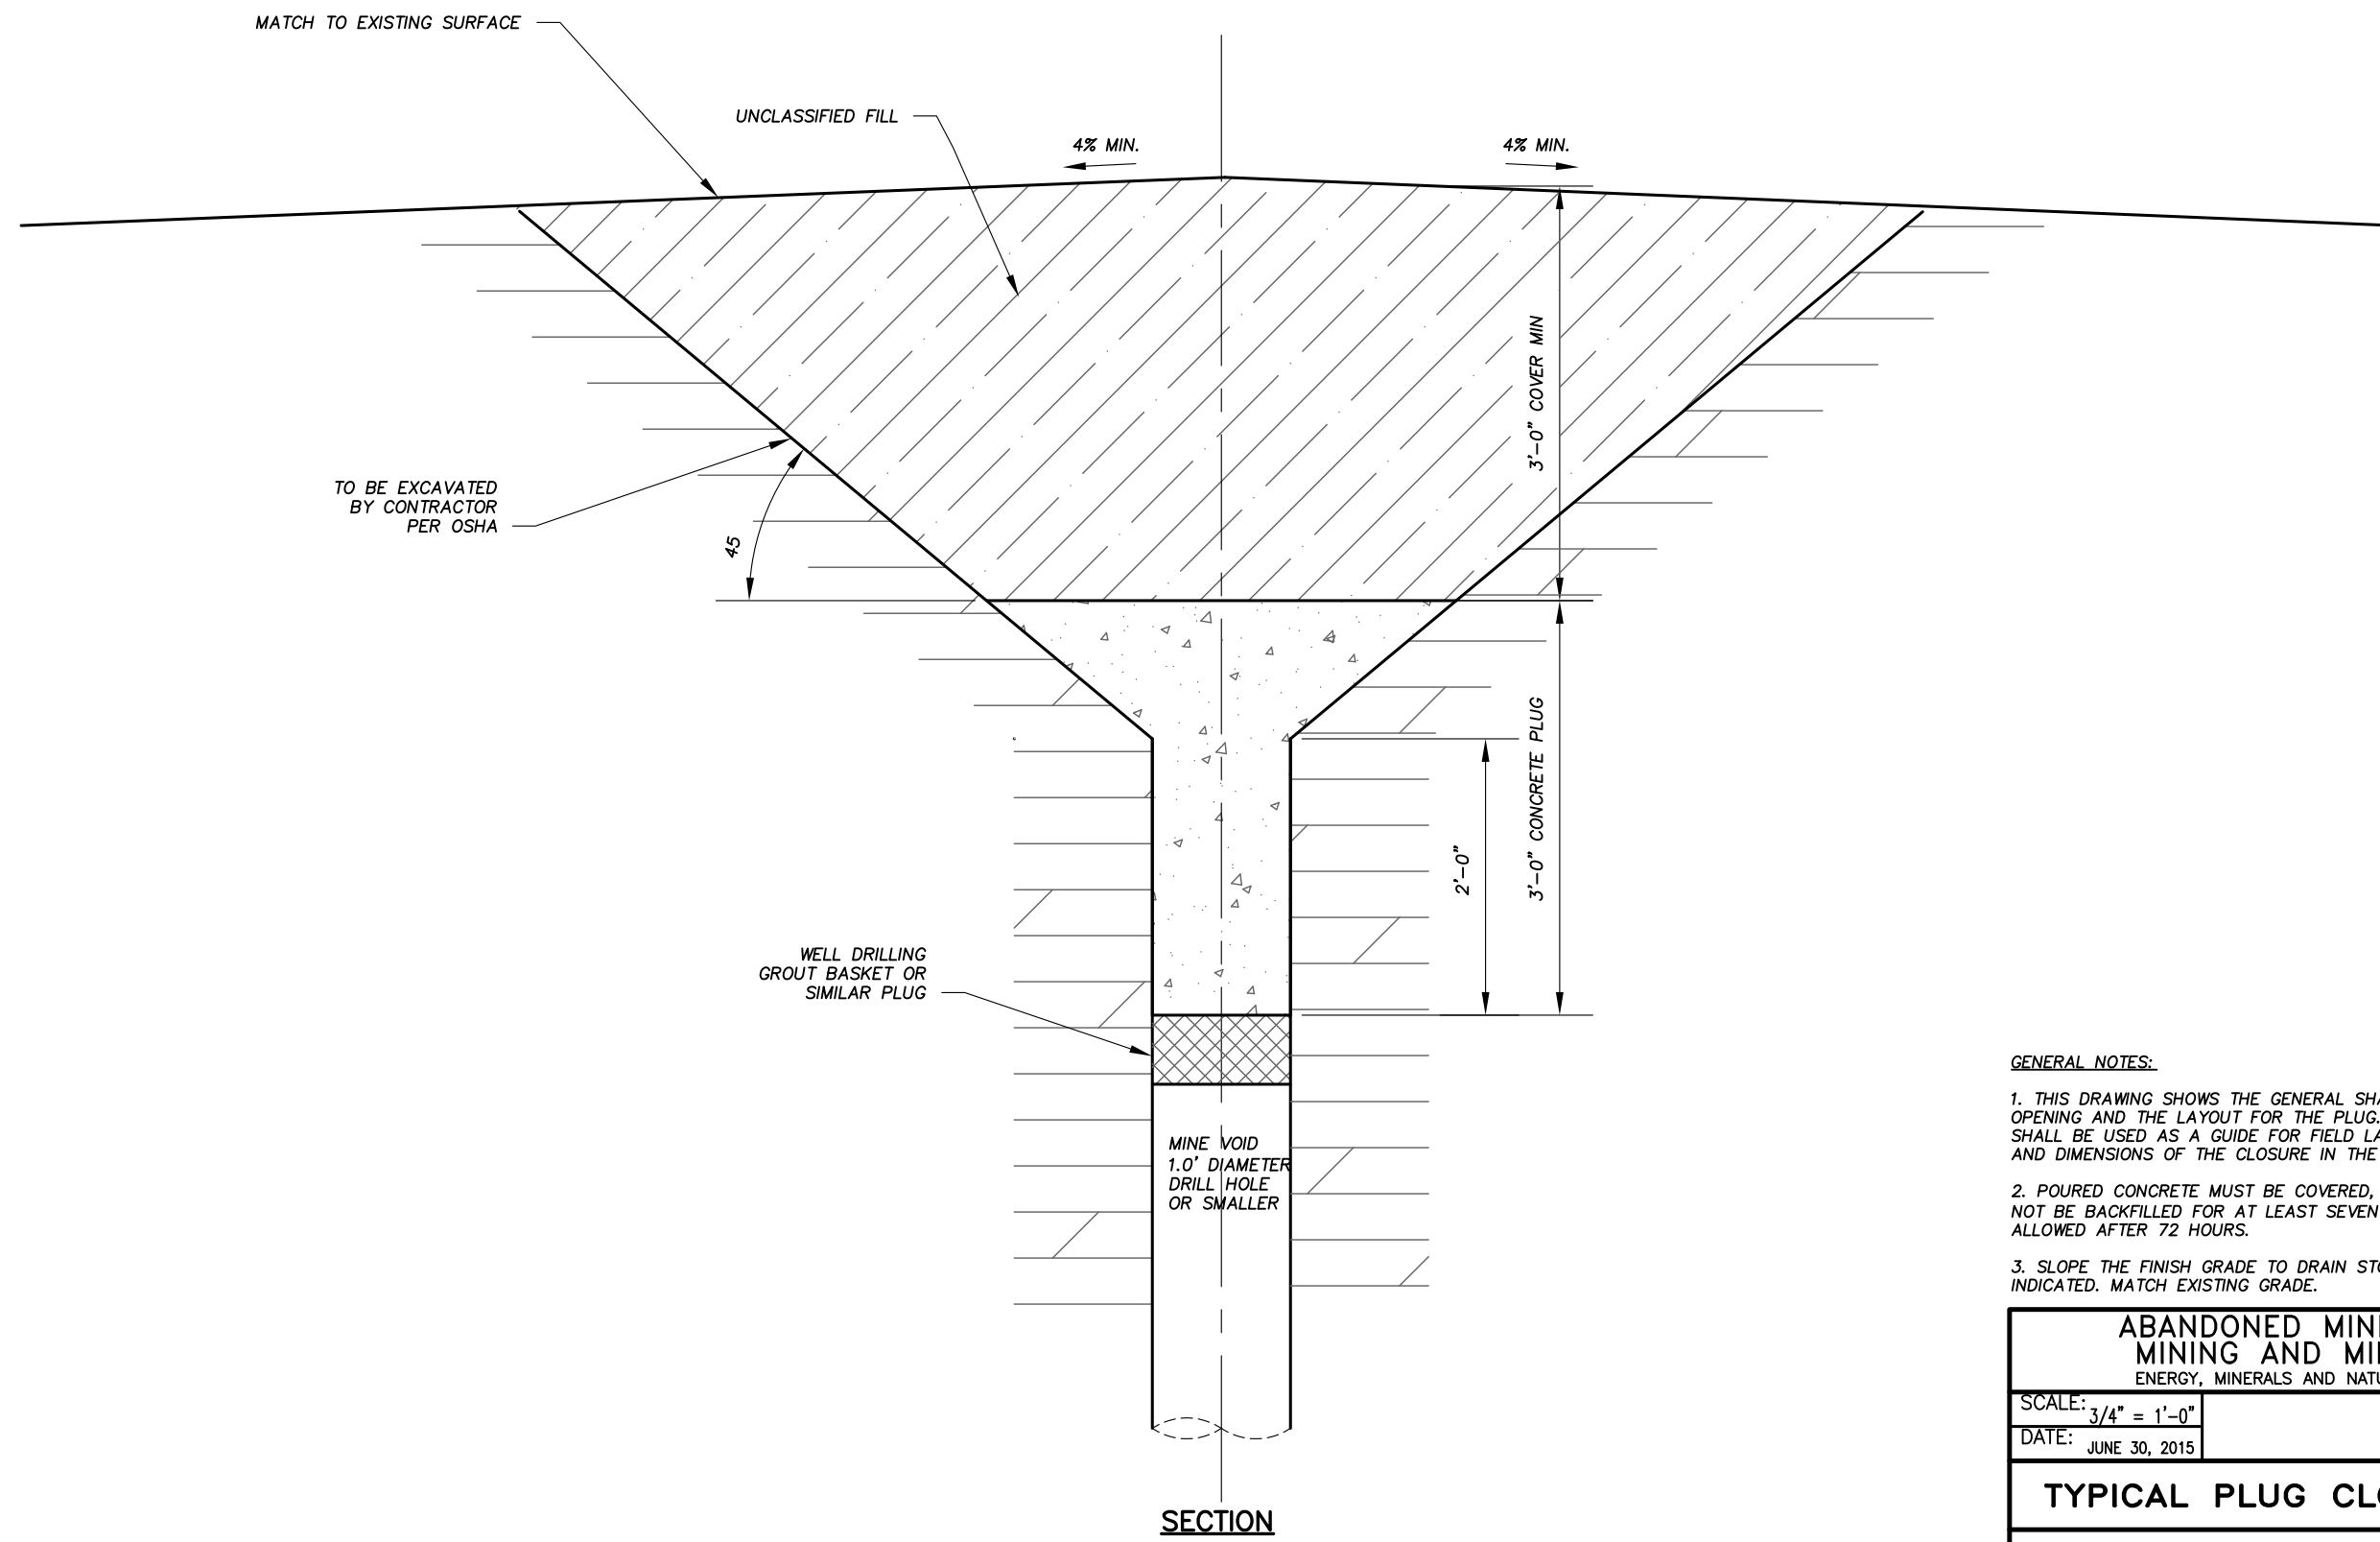

GENERAL NOTES:

1. THIS DRAWING SHOWS THE GENERAL SHAPE AND APPROXIMATE SIZE OF THE MINE OPENING AND THE LAYOUT FOR THE PLUG. HOLES VARY IN SIZE. THE DRAWING SHALL BE USED AS A GUIDE FOR FIELD LAYOUT. DETERMINE THE ACTUAL LAYOUT AND DIMENSIONS OF THE CLOSURE IN THE FIELD PRIOR TO FABRICATION.
2. POURED CONCRETE MUST BE COVERED, KEPT CONTINUOUSLY MOIST AND MAY NOT BE BACKFILLED FOR AT LEAST SEVEN (7) DAYS UNLESS TYPE III CEMENT THEN ALLOWED AFTER 72 HOURS.
3. SLOPE THE FINISH GRADE TO DRAIN STORM WATER AWAY FROM THE PLUG AS INDICATED. MATCH EXISTING GRADE.

DRILL_HOLE_CLOSURE_DESIGN.DWG PLOT SCALE 1 = 16

ABANDONED MINE LAND PROGRAM MINING AND MINERALS DIVISION ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT	
SCALE: 3/4" = 1'-0"	DRAWN BY: JRS
DATE: JUNE 30, 2015	REVISED:
TYPICAL PLUG CLOSURE DRILL HOLE	
GRANTS URANIUM- PHASE III SAFEGUARD AND RECLAMATION PROJECT	DRAWING NUMBER: FIGURE 5